

Since 1985



H

ORIZONTAL MULTISTAGE OPENWELL PUMP

 **SHREE**
Niloskar Pumps
<http://www.niloskarpumps.com>


HORIZONTAL MULTISTAGE OPENWELL PUMP

Salient Features

- ✓ Compact and good ascetic looks
- ✓ Specially designed journal bushes for better cooling effect
- ✓ Designed for extensive voltage fluctuation
- ✓ Low Noise

| PUMP'S TECHNICAL SPECIFICATION

- Power Range - 2.2 kW - 5.5kW (3 HP - 7.5 HP)
- Max Current (A) - 12 A
- Speed (rpm) - 2880
- Duty - S1
- Max Total Head (m) - 75
- Max Discharge - 960 lpm
- Nominal Outlet size (inch) - 2 / 2.5
- Max Starts per hour - 20 times

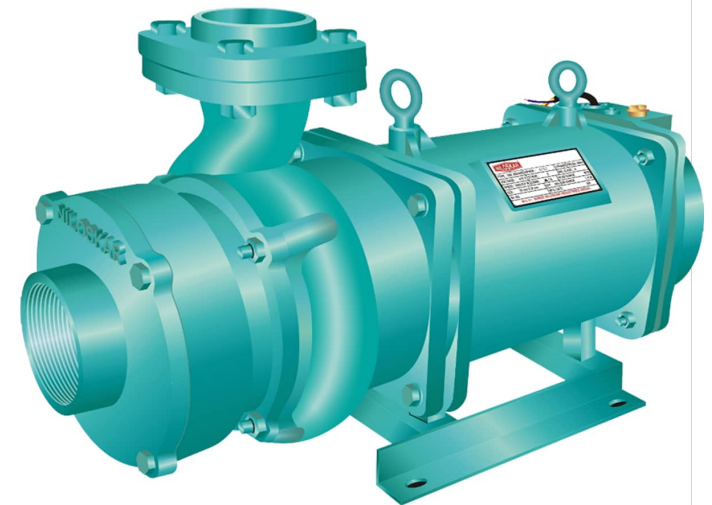

HORIZONTAL MULTISTAGE OPENWELL PUMP

| PUMP's MATERIAL SPECIFICATION

- Motor Body - Graded Cast Iron
- Impeller - SS 410 / CI
- Volute - Cast Iron
- Shaft - SS 420
- Journal Bearing Bush - Lead Bronze
- Thrust Assembly - SS 410 with graphite fiber



| PUMP's PERFORMANCE CHART

Performance Data @ 2800 rpm | 380 - 415 V | Three Phase | 50 Hz | A.C Supply

					HORIZONTAL MULTI-STAGE OPENWELL SUBMERSIBLE PUMP							
PUMP MODEL	HP	kW	MODEL	OUTLET SIZE(MM)	MODEL	DISCHARGE IN LPM						
						0	300	360	420	480	540	660
						HEAD IN METER						
NPHT01	3	2.2	2	65X50	V9 A.R	40	36	35	32	38	21	14
NPHT02	5	3.7	2	65X50	V9 A.R	48	45	42	40	38	32	24
NPHT03	6	4.5	2	65X50	V9 A.R	52	48	46	42	40	34	28

| Address

263 - 264, Shubh Industrial Estate,
Kathwada - Singarva Road, Kathwada
Ahmedabad - 382 430
Gujarat INDIA

| Phone No: +91 - 9824 134 716

| E-mail id:

Dealers: dealer@niloskarpumps.com

General: info@niloskarpumps.com

| Website: www.niloskarpumps.com